


Applicant: Jukka Alatola et al.  
PCT App. No.: PCT/FI2003/000594

**Remarks**

Claims 11–26 remain pending in the application.

Applicant believes that no new matter has been added by these amendments and that the application, as amended, is ready for examination. Favorable action thereon is respectfully solicited.

Respectfully submitted,

A handwritten signature in cursive script, reading "David R. J. Stiennon". The signature is written in dark ink and is positioned above a horizontal line.

David R. J. Stiennon, Reg. No. 33212


Attorney for Applicant

P.O. Box 1667

Madison, Wisconsin 53701-1667

(608) 250-4870

Amdt1.app

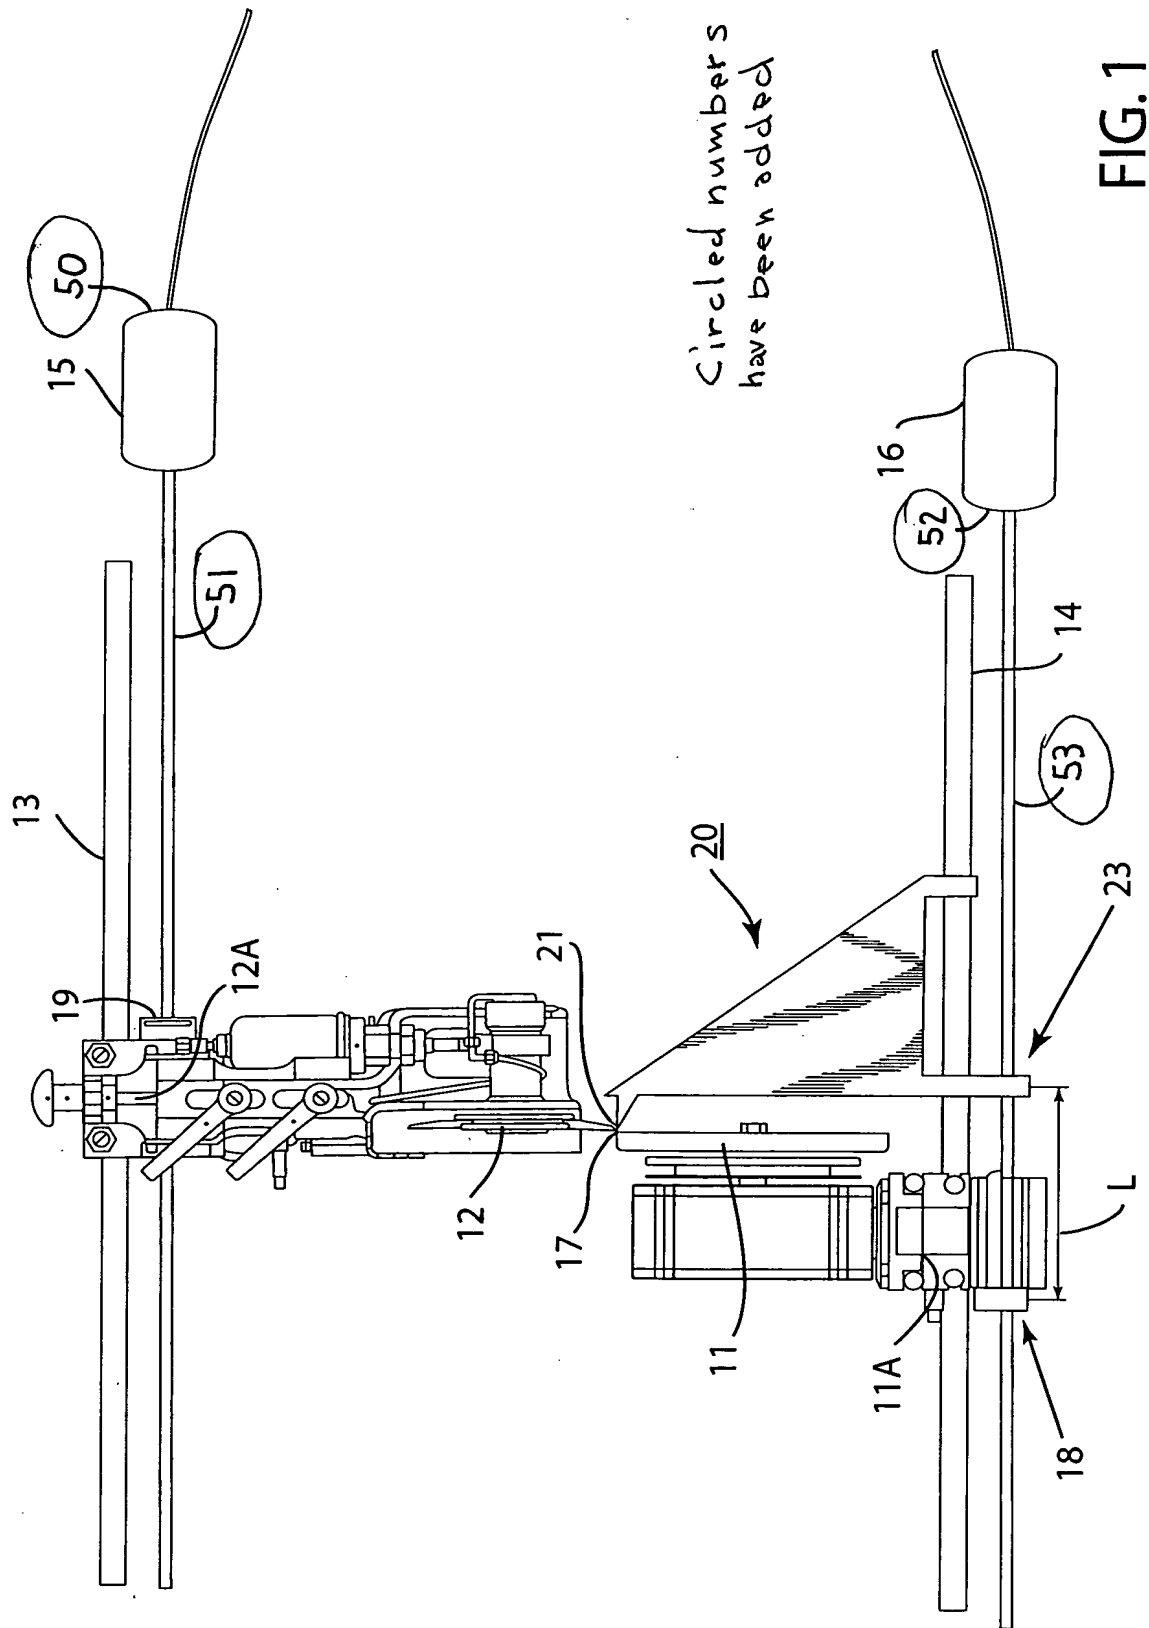

## In The United States Patent And Trademark Office

Applicant: Jukka Alatola et al.

Date: February 8, 2005

Date Filed: Simultaneously herewith

Docket No.: FORSAL-101

PCT App. No.: PCT/FI2003/000594


For: Method and Device for Calibrating the Position of Blades of a Slitter-Winder of a Paper or Board Machine

**Certificate of Express Mailing**

I hereby certify that this document is being deposited with  
the United States Postal Service "Express Mail Post Office to  
Addressee" service under 35 C.F.R. §1.10

on 2/8/05with Mailing Label No. EV 507 230 863 US

and is addressed to the Commissioner for Patents, P.O. Box  
1450, Alexandria, VA 22313-1450



Signature

David R. J. Stiennon, Reg. No. 33212

Name of applicant, assignee or Registered Representative

Marked Up Copy of Substitute Specification under 37 C.F.R. 1.125(b)(2)

**TITLE OF THE INVENTION**

Method and [d]Device for [c]Calibrating the [p]Position of [b]Blades of a  
[slitter-winder] Slitter-Winder  
of a [p]Paper or [board machine]

5 The invention relates to a method according to the preamble of claim 1.

The invention also relates to a device according to the preamble of claim 7.

]Board Machine

**CROSS REFERENCES TO RELATED APPLICATIONS**

**[0001] This application is a U.S. national stage application of International App. No. PCT/FI2003/000594, filed Aug. 7, 2003, the disclosure of which is incorporated by reference herein, and claims priority on Finnish Application No. 20021454, Filed Aug. 8, 2002.**

5

**STATEMENT AS TO RIGHTS TO INVENTIONS MADE UNDER  
FEDERALLY SPONSORED RESEARCH AND DEVELOPMENT**  
**[0002] Not applicable.**

## **BACKGROUND OF THE INVENTION**

**[0003]** In the slitter-winders of paper and board machines a web is cut in the cross-direction into several component webs, and a pair of blades comprising a top blade and a bottom blade is used in the cutting. The width of the component webs to be slit by the blades and thus the position of the slitting blades can vary to a great extent when different blade settings are used, depending on the set widths of the rolls to be produced. The slitting blades have to be positioned, in the lateral direction of the web, in the right slitting position corresponding to the desired roll widths. In order to produce component webs of the desired width the slitting blades of the slitter-winder are spaced apart as desired in the lateral direction of the paper or board web i.e. a change of settings is carried out.

**[As to][0004]** **[prior]** **[art related to the invention reference is made to]** FI patent 68185[, **which**] discloses a method and a system for position change. This publication describes **[the use of the]** a method in a system used in the slitting of a paper web, in which **[system]**, to observe the position of the slitting device, a measuring device is used which is in a position arrangement which comprises actuating members for controlling and performing the movement of the measuring device in the cross-direction of the web and which system comprises at least one limiter i.e. for limiting the operation of the measuring device along the distance between the extreme positions such that one extreme position serves as the datum position for the determination. An observing device in both directions of movement observes at least one member of the slitting device. The system comprises drive means for the actuating members and moving devices performing a corrective movement of a movable device or member. The position of the slitting blades has been determined during a standstill of the machine by means of this known arrangement, having the aim of minimizing the duration of the standstill.

**[0005]** It is known from prior art to measure the position of the blades used in slitting by means of a carriage-type arrangement, in which a sensor is placed in a moving carriage with which, by means of optic or magnetic measurement, the

position of the blades has been established. These measurement methods are used in connection with the changing of settings.

**[0006]** In a prior art application based on magnetic measurement each blade carriage is equipped with a fixed permanent magnet, and the distance between the permanent magnet and the slitting blade is constant, and the position of the permanent magnet connected to the blade carriage is measured by means of a magnetic measuring device, thereby establishing the position of the blade. In connection with the changing of blade settings, information is also needed, in addition to the information on the position of the sharpening blades, on the new, replacing blades and, after the detachment and grinding of the blades, position information, since, after these steps, the distance between the slitting blade edge and the magnet of the blade carriage changes, which means that no exact information on the position of the blade is available based on the results from the measurement methods described above. Also, the slitting blade edge wears, which leads to inaccuracy when using the above-mentioned measurement methods. In the above-described situations, when prior art applications have been used, there has been a need to carry out so-called tuning runs in order to determine the position of the slitting blade edge.

## **SUMMARY OF THE INVENTION**

5 **[0007]** It is an object of the invention to provide a solution for eliminating or at least minimizing the disadvantages described above. An object of the invention is to provide an easy-to-use and reliably operating method and device for calibrating the position of the blades of a slitter-winder.

**[To achieve the afore-mentioned objects and those that come out later the method according to the invention is mainly characterized in what is presented in the characterizing part of claim 1.**

10 **The device according to the invention is in turn characterized in what is presented in the characterizing part of claim 7.**

15 **[0008]** The invention is based on a magnetostrictive sensor known as such, which sends out magnetic pulses on the basis of whose returning time the position of the blade is determined. Each top and bottom blade used in slitting comprises a permanent magnet on the basis of which information is continuously received on the position of the blades.

**[0009]** According to the invention at least one of the measurement points of the sensor is used, and magnetostrictive measurement is most appropriately used as the measurement method, some other equivalent multipoint measurement method also being suitable in this connection.

20 **[0010]** According to the invention, when the position of the blade carriage changes in relation to the position of the slitting edge, a measuring device i.e. a calibration tool is used, which is placed by the blade so that the positioning member of the calibration tool touches the slitting edge. The calibration tool is located on a guide and the position of the slitting edge is determined based on the measurement results  
25 of the magnet pairs or equivalent measuring members. When the blade concerned is known, it is possible to calculate, based on the distances, the exact position for the



slitting edge. The device according to the invention is used on a slitter-winder when the blade is calibrated, e.g. when the bottom blade is worn or when changing the top blade, whereby information on the position of the slitting blade edge is received immediately, e.g. after a blade change, without separate tuning runs or the like.

5     **[0011]** The device according to the invention comprises, according to one of its advantageous applications, a manually operated measuring device equipped with a permanent magnet and its use in connection with a magnetostrictive sensor in the off-set calibration of a slitting blade edge. According to the invention the measuring device can also be positioned using other ways of measurement, e.g. based on optic  
10     procedure. Different types of data transfer procedures and wire and wireless, preferably digital, data transfer can be used in connection with the invention.

**[0012]** According to an advantageous application of the invention a manually operated measuring device is pressed against a blade guide and moved sideways to be in contact with the blade to be measured. Attachment to the guides allows the  
15     position of the magnet of the measuring device with respect to the sensor to be established, and it ensures that the direction of measurement is right. After this, the position of the magnet of the measuring device is read by means of a magnetostrictive sensor and the distance between the slitting blade edge and the fixed magnet of the blade carriage is calculated by software. According to the  
20     invention the calibrated blade positions can be brought accurately to the target i.e. to the desired slitting point without separate control measurements and movements or tuning runs and, in addition, the exact position of the blade is known at all times on the basis of feedback data.

**[0013]** According to a further advantageous feature of the invention the calibration  
25     can be automated, for example, so that when the measuring device finds a magnet, it performs the calibration, e.g., after the expiration of ten seconds, or, for example, a control button or an equivalent arrangement is used for performing the measurement.

5     **[0014]** The calibration according to the invention can be carried out easily without slide gauges or other equivalent precision tools. A further advantage of the invention is that, most appropriately, the calibration measurement procedure makes use of the same measurement method that is used in any case in determining the position of the blades.

10     **[0015]** In addition to the actual calibration tool no separate auxiliary devices or other accessories are needed in the invention and it is suited to be used for both the top and the bottom blades and for left- and right-handed blades. The device according to the invention is easy to use, thus reducing the chance of human mistakes, and the calibration arrangement according to the invention is easy to put into practice and does not require any special know-how.

15     **[0016]** A further advantage obtained by means of the invention is that, if the blade carriage is in an oblique position, which as such does not affect the mechanical operation of the slitting blade, this defect -- irrectifiable as such only by improvement of measurement precision in other procedures -- is also eliminated. Since the calibration tool according to the invention performs the measurement from the slitting point, better quality in the width of the component webs to be slit and thus in the delivery tolerance of the rolls can be obtained.

20     **[0017]** In the following, the invention will be described in greater detail with reference to the figures of the accompanying drawing.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[Figure ][0018] FIG.1** shows an application of the invention as a schematic example.

5 **[Figure][0019] FIG. 2A** shows a schematic block diagram representation of a prior art blade change sequence.

**[Figure][0020] FIG. 2B** shows a schematic block diagram representation of an application of the method according to the invention.

## **DESCRIPTION OF THE PREFERRED EMBODIMENTS**

[The Figure][0021] **FIG. 1** shows one of the top and bottom blade pairs used in slitting. [The bottom blade has the reference number 11 and the top blade has the reference number 12. The]A top blade 12 is attached to a blade carriage 12A, which is arranged to be movable along an upper guide 13, and [the]a bottom blade 11 is attached to a blade carriage 11A, which is arranged to be movable along a lower guide 14. Each blade carriage 11A, 12A is equipped with a position magnet 18, 19. A magnetostrictive position sensor 15, 16 is arranged below each guide 13, 14, respectively, by means of which sensor the position of the respective position magnet 19, 18 is measured. The upper magnetostrictive position sensor has a first element 50 and a second element 51 which extends beneath the upper guide 13. The lower magnetostrictive position sensor 16 has a first element 52 and a second element 53 which extends beneath the lower guide 14.

[0022] The calibration tool 20[ according to the invention is,] in th[is]e example[,], shown in FIG. 1 is disposed on the lower guide 14[ and the control edge 21 of t]. The calibration tool 20 has a protruding control edge 21. The calibration tool is arranged on the guide 14 so that [it]the control edge 21 touches a slitting edge 17 of the bottom blade 11. A position magnet 23 is attached in connection with the calibration tool 20[ has the reference number 23], and the magnet marking the position of the bottom blade 11 has the reference number 18, which means that the off-set distance L between the position magnet 23 of the calibration tool 20 and the position magnet 18 of the bottom blade 11 can be determined by means of magnetostrictive measurement.

[0023] When the calibration tool 20 is attached to the blade guide 14 and moved sideways [to be]so that the control edge 21 is in contact with the slitting edge 17 of the ground bottom blade 11, [it is achieved, on ]the [basis of measurement results, by reading the]precise position of the [magnet 23]blade edge 17 is determined as follows. The position of the calibration tool [by means of]magnet 23 is measured by the magnetostrictive sensor 16[ and by computing by software], as is the

position of the permanent magnet 18 on the bottom blade carriage 11A.  
Software then computes the distance between the slitting blade edge (as  
determined by the position of the calibration tool control edge) and the  
permanent magnet 18 of the bottom blade 11[, whereby the position of the slitting  
5 blade edge 17 can be determined precisely.

Figure]. The distance between the bottom blade carriage permanent magnet 18  
and the blade edge 17 is then known. The blade carriage can then be moved to  
position with the blade edge 17 in a known position.

[0024] FIG. 2A shows a prior art blade change sequence, according to which, after  
10 a blade change, block 31, manual positioning of a bottom and a top blade, block 32,  
has been carried out, whereafter, according to block 33, generally three control  
measurements of the blades have been performed by means of a measurement  
carriage. After this, the blades have been moved to their positions, as shown in block  
34, and a control measurement of the blades has been carried out by means of the  
15 measurement carriage, block 35, whereafter, in the last stage, the blades are in their  
positions according to the setting, block 36. As illustrated by this series of  
[pictures]steps the blade change sequence has consisted of several different stages.

[Figure][0025] FIG. 2B shows a blade change sequence when using the method  
and device according to the invention in calibrating the position of the blades,  
20 whereby, after a blade change, block 41, the blade is calibrated according to the  
invention, block 42, whereafter the blades have been moved to their positions, block  
43. After this, the blades are in their positions according to the setting, block 44.  
[Figures]FIGS. 2A and 2B thus demonstrate that, by means of the calibration  
according to the invention, many stages can be omitted in connection with the  
25 measurements and positionings carried out in connection with blade change.

[0026] In the foregoing the invention has been described with reference only to  
some of its advantageous exemplifying embodiments, to the details of which the

invention is, however, by no means intended to be narrowly confined.

~~{Abstract~~

~~The invention relates to a method for calibrating the position of blades}~~  
**ABSTRACT OF THE DISCLOSURE**

**A positioning member (21) of a calibration tool (20) touches a slitting edge (17)**  
5 **of one of the blades (11, 12 ) to be calibrated** of a slitter-winder of a paper or  
board machine~~{, which blades (11,12) are attached to blade carriages (11A,12A)~~  
~~or the like disposed on guides (14,13) or the like, in which method the position~~  
~~of the blades (11,12) of the slitter-winder is measured by means of a multipoint~~  
~~measurement method, whereby the position of the blade carriage (11A,12A) of~~  
10 ~~the respective blade (11,12) is measured. In the method the position of the~~  
~~blades (11,12) is calibrated with a calibration tool (20). A positioning member~~  
~~(21) of the calibration tool (20) is arranged to touch a slitting edge (17) of the~~  
~~blade (11) to be calibrated. The position of the calibration tool (20) is measured~~  
~~by means of}~~. **The tool (20) position is measured by** the multipoint measurement  
15 method and ~~{the}edge position{ of the slitting edge (17) of the blade (11)}~~ is  
determined based on the measurement result of the position of the calibration tool  
(20). ~~{The invention also relates to a}~~ **A device for calibrating {the}blade position{**  
~~of blades of a slitter-winder of a paper or board machine, which device}~~ is  
disposed in connection with the slitter-winder ~~{of the paper or board machine;~~  
20 ~~{which{ slitter-winder} comprises{ pairs of blades comprising} a top blade (12)~~  
and a bottom blade (11), attached to ~~{their}~~respective blade carriages (11A,12A)  
~~{arranged to be}which are~~ movable along a guide (14,13)~~{ or the like, in~~  
~~connection of which slitter-winder means (15,16,18,19) are arranged for~~  
~~measuring the position of the blades (11,12). In the method the device used for~~  
25 ~~calibrating the position of the blades (11,12) is a}~~. **The calibration tool (20){**  
**which}** is arranged to be attached to the same guide (14) with the blade (11) to be  
calibrated. The calibration tool (20) **{comprises}has** a means (21) for indicating the  
slitting edge (17) of the blade (11) and means (23,16) for measuring the position of  
the calibration tool (20).~~{}~~